PREVENTIVE MAINTENANCE PROGRAM

La Marzocco Linea Classic S

12-month PM program for AV models · 75% off PM labor and trip.

12	1	75%	$37.50/hr	$37.50
MONTH PLAN	SCHEDULED PM VISIT	OFF PM LABOR & TRIP	PROGRAM LABOR RATE	PROGRAM TRIP CHARGE

Annual PM · Month 12 · 2 hrs program labor

EVERY ANNUAL VISIT

- Sample pre- and post-filtration water; test TDS and hardness with the La Marzocco water test kit
- Clean and backflush the machine
- Replace group gaskets and diffuser screens
- Rebuild steam valves; replace steam valve anti-suction valves and the steam boiler vacuum breaker
- Replace the pressure safety valve
- Inspect the drain system, steam boiler pressure-stat and contactor
- Clean the auto-fill probe and test operation
- Test flow rate on every group
- Verify coffee boiler set point and check brew pressure
- Test all switches and inspect portafilter baskets

AV MODEL TESTS

- Test shot volumes
- Test DC voltage
- Test flow meter resistance (2.2 kΩ ±10%) on every group

Standard rates: $150.00/hr labor and $150.00 trip. Program rates: $37.50/hr labor and $37.50 per visit. The trip charge is included in every total in this guide.

PARTS

PM Kit Contents

PART	PART #	WORK PERFORMED	REPLACED EVERY	UNIT COST
Group gasket, 8 mm	H.3.001	Replace group gaskets	12 months	$3.58 / group
Diffuser screen	F.3.040	Replace diffuser screens	12 months	$20.44 / group
Steam valve rebuild kit	L165/K	Rebuild steam valves (one kit per wand)	12 months	$39.88
Steam anti-suction valve	L192	Replace steam valve anti-suction valves	12 months	$39.47
Steam boiler vacuum breaker	L190	Replace steam boiler vacuum breaker	12 months	$25.33
Pressure safety valve	B.2.024	Replace pressure safety valve	12 months	$99.38
Water test kit	F.9.000.01	Sample pre- and post-filtration water; test TDS and hardness	12 months	$11.98

INSPECTED, NOT INCLUDED

PART	PART #	PRICE
Water level / auto-fill probe	LA052	$52.86
Contactor, 2 and 3 group	L500	$210.17
Contactor, 4 group	L510	$428.79
Pressure-stat, UL	L270/UL	$358.74
Pressure switch membrane kit	L270/1	$85.82

Checked on every visit (the auto-fill probe is also cleaned and tested). Not included in the totals. Replaced and quoted only if a part fails inspection.


CONFIGURATION 1 OF 4

1 Group

1 group · AV

AV 12-MO TOTAL	PARTS	PROGRAM LABOR + TRIP	LABOR + TRIP SAVINGS
$431.91	**$319.41**	**$112.50**	**$337.50**

ANNUAL COST BREAKDOWN

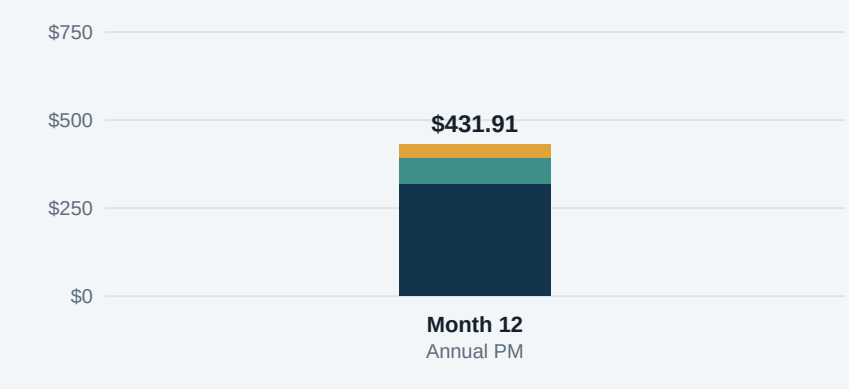

	PARTS	LABOR	TRIP	TOTAL
Month 12 · Annual PM	$319.41	$75.00	$37.50	**$431.91**

PARTS LIST

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	1	$3.58	$3.58
Diffuser screen	F.3.040	1	$20.44	$20.44
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

	STANDARD	PROGRAM	YOU SAVE
Labor · 2 hrs	$300.00	$75.00	$225.00
Trip · 1 visit	$150.00	$37.50	$112.50
Labor + trip	**$450.00**	**$112.50**	$337.50


CONFIGURATION 2 OF 4

2 Group

2 groups · AV

AV 12-MO TOTAL	PARTS	PROGRAM LABOR + TRIP	LABOR + TRIP SAVINGS
$455.93	$343.43	$112.50	$337.50

ANNUAL COST BREAKDOWN

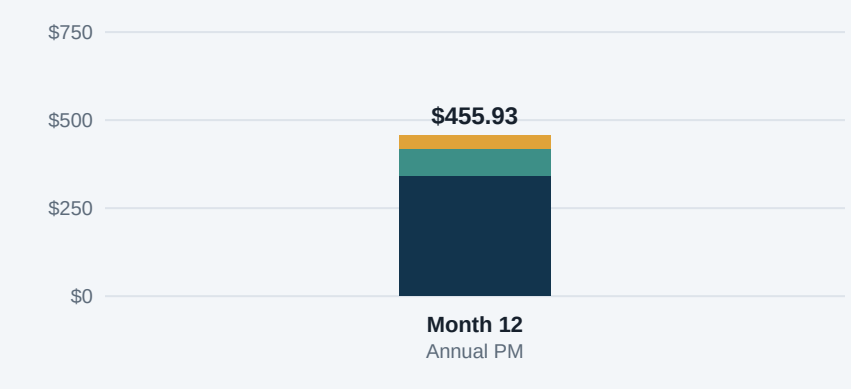

	PARTS	LABOR	TRIP	TOTAL
Month 12 · Annual PM	$343.43	$75.00	$37.50	**$455.93**

PARTS LIST

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	2	$3.58	$7.16
Diffuser screen	F.3.040	2	$20.44	$40.88
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

	STANDARD	PROGRAM	YOU SAVE
Labor · 2 hrs	$300.00	$75.00	$225.00
Trip · 1 visit	$150.00	$37.50	$112.50
Labor + trip	**$450.00**	**$112.50**	$337.50


CONFIGURATION 3 OF 4

3 Group

3 groups · AV

AV 12-MO TOTAL	PARTS	PROGRAM LABOR + TRIP	LABOR + TRIP SAVINGS
$479.95	**$367.45**	**$112.50**	**$337.50**

ANNUAL COST BREAKDOWN

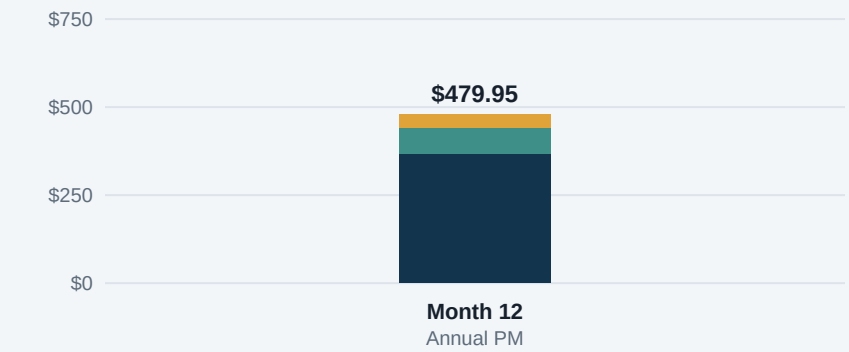

	PARTS	LABOR	TRIP	TOTAL
Month 12 · Annual PM	$367.45	$75.00	$37.50	**$479.95**

PARTS LIST

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	3	$3.58	$10.74
Diffuser screen	F.3.040	3	$20.44	$61.32
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

	STANDARD	PROGRAM	YOU SAVE
Labor · 2 hrs	$300.00	$75.00	**$225.00**
Trip · 1 visit	$150.00	$37.50	**$112.50**
Labor + trip	**$450.00**	**$112.50**	**$337.50**


CONFIGURATION 4 OF 4

4 Group

4 groups · AV

AV 12-MO TOTAL	PARTS	PROGRAM LABOR + TRIP	LABOR + TRIP SAVINGS
$503.97	**$391.47**	**$112.50**	**$337.50**

ANNUAL COST BREAKDOWN

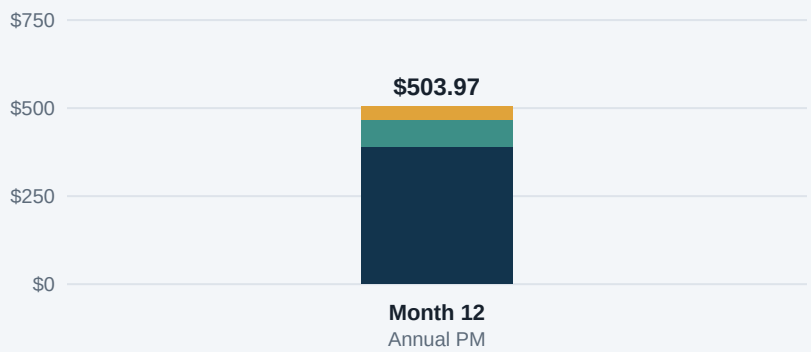

	PARTS	LABOR	TRIP	TOTAL
Month 12 · Annual PM	$391.47	$75.00	$37.50	**$503.97**

PARTS LIST

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	4	$3.58	$14.32
Diffuser screen	F.3.040	4	$20.44	$81.76
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

	STANDARD	PROGRAM	YOU SAVE
Labor · 2 hrs	$300.00	$75.00	**$225.00**
Trip · 1 visit	$150.00	$37.50	**$112.50**
Labor + trip	**$450.00**	**$112.50**	**$337.50**

SUMMARY

12-Month PM Cost by Configuration

CONFIGURATION	PARTS	LABOR	TRIP	AV TOTAL
1 Group	$319.41	$75.00	$37.50	**$431.91**
2 Group	$343.43	$75.00	$37.50	**$455.93**
3 Group	$367.45	$75.00	$37.50	**$479.95**
4 Group	$391.47	$75.00	$37.50	**$503.97**

GOOD TO KNOW

- At least one PM visit per year is recommended.
- Labor and trip are 75% off standard rates and are included in every total.
- Parts are list price. Items that are only inspected are quoted if they need replacing.
- Installation is not included in PM pricing.