PREVENTIVE MAINTENANCE PROGRAM

La Marzocco Linea Classic S

12-month PM program for AV models · 75% off PM labor and trip.

12	1	75%	$37.50/hr	$37.50
MONTH PLAN	SCHEDULED PM VISIT	OFF PM LABOR & TRIP	PROGRAM LABOR RATE	PROGRAM TRIP CHARGE

12-month PM: highly recommended every year. Add a 6-month visit if your machine sees high volume. See Service Intervals, page 7.

EVERY ANNUAL VISIT · 12-MONTH PM · 2 HRS LABOR

- Sample pre- and post-filtration water; test TDS and hardness with the La Marzocco water test kit
- Clean and backflush the machine
- Replace group gaskets and diffuser screens
- Rebuild steam valves; replace steam valve anti-suction valves and the steam boiler vacuum breaker
- Replace the pressure safety valve
- Inspect the drain system, steam boiler pressure-stat and contactor
- Clean the auto-fill probe and test operation
- Test flow rate on every group
- Verify coffee boiler set point and check brew pressure
- Test all switches and inspect portafilter baskets

AV MODEL TESTS

- Test shot volumes
- Test DC voltage
- Test flow meter resistance (2.2 kΩ ±10%) on every group

6-MONTH PM · 1 HR LABOR

Replace group gaskets and diffuser screens, rebuild the steam valves, and run the full inspection checklist.

3/9-MONTH PM · 1 HR LABOR

Replace group gaskets and diffuser screens, then run the full inspection checklist.

Parts pricing is subject to change. Parts costs may be updated at any time, and any price update can affect the final price.

PARTS

PM Kit Contents

12-MONTH PM · ITEMIZED PARTS

PART	PART #	WORK PERFORMED	REPLACED EVERY	UNIT COST
Group gasket, 8 mm	H.3.001	Replace group gaskets	12 months	$3.58 / group
Diffuser screen	F.3.040	Replace diffuser screens	12 months	$20.44 / group
Steam valve rebuild kit	L165/K	Rebuild steam valves (one kit per wand)	12 months	$39.88
Steam anti-suction valve	L192	Replace steam valve anti-suction valves	12 months	$39.47
Steam boiler vacuum breaker	L190	Replace steam boiler vacuum breaker	12 months	$25.33
Pressure safety valve	B.2.024	Replace pressure safety valve	12 months	$99.38
Water test kit	F.9.000.01	Sample pre- and post-filtration water; test TDS and hardness	12 months	$11.98

6-MONTH AND 3/9-MONTH PM KITS

KIT	WORK PERFORMED	REPLACED EVERY	1 GROUP	2 GROUP	3 GROUP	4 GROUP
6-month PM kit	Replace group gaskets and diffuser screens; rebuild steam valves	6 months	LCS.6.1 **$136.77**	LCS.6.2 **$154.56**	LCS.6.3 **$180.62**	LCS.6.4 **$206.68**
3/9-month PM kit	Replace group gaskets and diffuser screens	3 and 9 months	LCS.3.1 **$26.06**	LCS.3.2 **$52.12**	LCS.3.3 **$78.18**	LCS.3.4 **$104.24**

INSPECTED, NOT INCLUDED

Water level / auto-fill probe LA052 **$52.86** · Contactor, 2 and 3 group L500 **$210.17** · Contactor, 4 group L510 **$428.79** · Pressure-stat, UL L270/UL **$358.74** · Pressure switch membrane kit L270/1 **$85.82**

Checked on every visit (the auto-fill probe is also cleaned and tested). Not included in the totals. Replaced and quoted only if a part fails inspection.


CONFIGURATION 1 OF 4

1 Group

1 group · AV

12-MONTH PM	6-MONTH PM	3/9-MONTH PM	SAVINGS, 12-MO VISIT
$431.91	**$211.77**	**$101.06**	**$337.50**

COST BY SERVICE INTERVAL

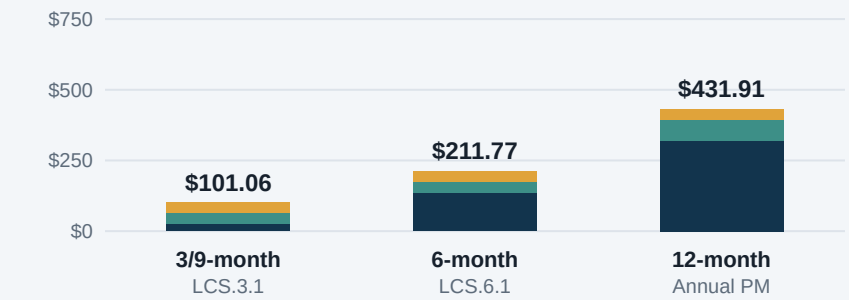

	PARTS	LABOR	TRIP	TOTAL
3/9-month · LCS.3.1	$26.06	$37.50	$37.50	**$101.06**
6-month · LCS.6.1	$136.77	$37.50	$37.50	**$211.77**
12-month · Annual PM	$319.41	$75.00	$37.50	**$431.91**

YEARLY · 12-MONTH INTERVALS	YEARLY · 6-MONTH INTERVALS	YEARLY · QUARTERLY
$431.91	**$643.68**	**$845.80**

PARTS LIST · 12-MONTH PM AND KITS

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	1	$3.58	$3.58
Diffuser screen	F.3.040	1	$20.44	$20.44
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98
6-month PM kit *(per visit)*	LCS.6.1	1	$136.77	$136.77
3/9-month PM kit *(per visit)*	LCS.3.1	1	$26.06	$26.06

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

PER VISIT	STANDARD	PROGRAM	YOU SAVE
12-month PM · 2 hrs + trip	$450.00	$112.50	**$337.50**
6-month PM · 1 hr + trip	$300.00	$75.00	**$225.00**
3/9-month PM · 1 hr + trip	$300.00	$75.00	**$225.00**


CONFIGURATION 2 OF 4

2 Group

2 groups · AV

12-MONTH PM	6-MONTH PM	3/9-MONTH PM	SAVINGS, 12-MO VISIT
$455.93	$229.56	$127.12	$337.50

COST BY SERVICE INTERVAL

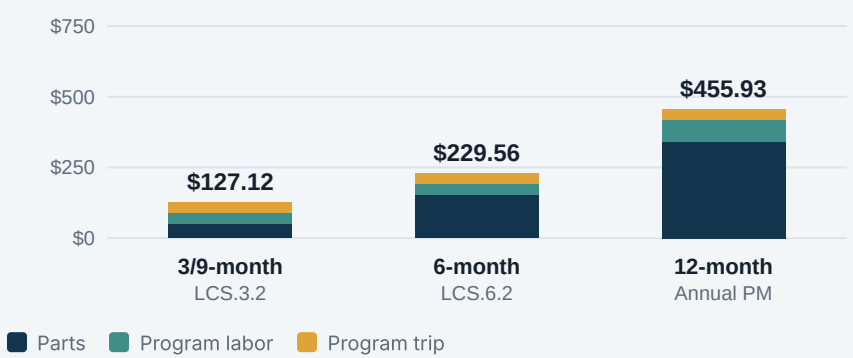

	PARTS	LABOR	TRIP	TOTAL
3/9-month · LCS.3.2	$52.12	$37.50	$37.50	**$127.12**
6-month · LCS.6.2	$154.56	$37.50	$37.50	**$229.56**
12-month · Annual PM	$343.43	$75.00	$37.50	**$455.93**

YEARLY · 12-MONTH INTERVALS	YEARLY · 6-MONTH INTERVALS	YEARLY · QUARTERLY
$455.93	$685.49	$939.73

PARTS LIST · 12-MONTH PM AND KITS

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	2	$3.58	$7.16
Diffuser screen	F.3.040	2	$20.44	$40.88
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98
6-month PM kit *(per visit)*	LCS.6.2	1	$154.56	$154.56
3/9-month PM kit *(per visit)*	LCS.3.2	1	$52.12	$52.12

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

PER VISIT	STANDARD	PROGRAM	YOU SAVE
12-month PM · 2 hrs + trip	$450.00	$112.50	$337.50
6-month PM · 1 hr + trip	$300.00	$75.00	$225.00
3/9-month PM · 1 hr + trip	$300.00	$75.00	$225.00


CONFIGURATION 3 OF 4

3 Group

3 groups · AV

12-MONTH PM	6-MONTH PM	3/9-MONTH PM	SAVINGS, 12-MO VISIT
$479.95	$255.62	$153.18	$337.50

COST BY SERVICE INTERVAL

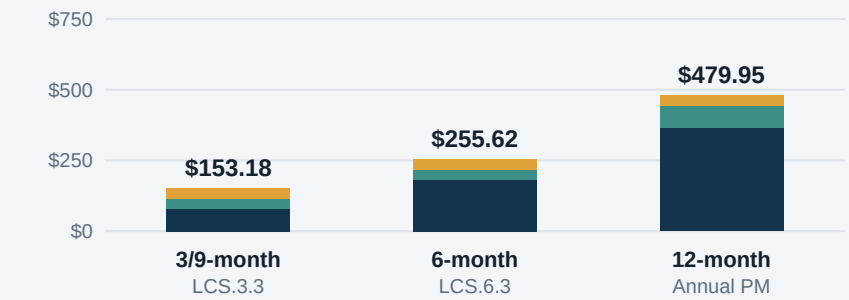

	PARTS	LABOR	TRIP	TOTAL
3/9-month · LCS.3.3	$78.18	$37.50	$37.50	**$153.18**
6-month · LCS.6.3	$180.62	$37.50	$37.50	**$255.62**
12-month · Annual PM	$367.45	$75.00	$37.50	**$479.95**

YEARLY · 12-MONTH INTERVALS	YEARLY · 6-MONTH INTERVALS	YEARLY · QUARTERLY
$479.95	$735.57	$1,041.93

PARTS LIST · 12-MONTH PM AND KITS

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	3	$3.58	$10.74
Diffuser screen	F.3.040	3	$20.44	$61.32
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98
6-month PM kit *(per visit)*	LCS.6.3	1	$180.62	$180.62
3/9-month PM kit *(per visit)*	LCS.3.3	1	$78.18	$78.18

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

PER VISIT	STANDARD	PROGRAM	YOU SAVE
12-month PM · 2 hrs + trip	$450.00	$112.50	$337.50
6-month PM · 1 hr + trip	$300.00	$75.00	$225.00
3/9-month PM · 1 hr + trip	$300.00	$75.00	$225.00


CONFIGURATION 4 OF 4

4 Group

4 groups · AV

12-MONTH PM	6-MONTH PM	3/9-MONTH PM	SAVINGS, 12-MO VISIT
$503.97	**$281.68**	**$179.24**	**$337.50**

COST BY SERVICE INTERVAL

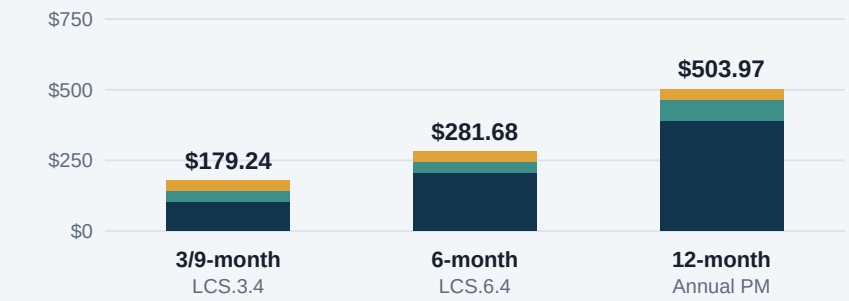

	PARTS	LABOR	TRIP	TOTAL
3/9-month · LCS.3.4	$104.24	$37.50	$37.50	**$179.24**
6-month · LCS.6.4	$206.68	$37.50	$37.50	**$281.68**
12-month · Annual PM	$391.47	$75.00	$37.50	**$503.97**

YEARLY · 12-MONTH INTERVALS	YEARLY · 6-MONTH INTERVALS	YEARLY · QUARTERLY
$503.97	**$785.65**	**$1,144.13**

PARTS LIST · 12-MONTH PM AND KITS

PART	PART #	QTY	UNIT	EXT.
Group gasket, 8 mm	H.3.001	4	$3.58	$14.32
Diffuser screen	F.3.040	4	$20.44	$81.76
Steam valve rebuild kit	L165/K	2	$39.88	$79.76
Steam anti-suction valve	L192	2	$39.47	$78.94
Steam boiler vacuum breaker	L190	1	$25.33	$25.33
Pressure safety valve	B.2.024	1	$99.38	$99.38
Water test kit	F.9.000.01	1	$11.98	$11.98
6-month PM kit *(per visit)*	LCS.6.4	1	$206.68	$206.68
3/9-month PM kit *(per visit)*	LCS.3.4	1	$104.24	$104.24

LABOR & TRIP DISCOUNT

75% off

Labor $150.00 → $37.50/hr · Trip $150.00 → $37.50 per visit

PER VISIT	STANDARD	PROGRAM	YOU SAVE
12-month PM · 2 hrs + trip	$450.00	$112.50	**$337.50**
6-month PM · 1 hr + trip	$300.00	$75.00	**$225.00**
3/9-month PM · 1 hr + trip	$300.00	$75.00	**$225.00**

SERVICE INTERVALS

Recommended Service Intervals

HIGHLY RECOMMENDED
12-month intervals
Visits at month 12

RECOMMENDED FOR HIGH VOLUME
6-month intervals
Visits at month 6, 12

SUGGESTED
Quarterly
Visits at month 3, 6, 9, 12

	COST PER VISIT			COST PER YEAR		
CONFIGURATION	3/9-MONTH	6-MONTH	12-MONTH	12-MONTH INTERVALS	6-MONTH INTERVALS	QUARTERLY
1 Group	**$101.06** kit LCS.3.1	**$211.77** kit LCS.6.1	**$431.91**	**$431.91**	**$643.68**	**$845.80**
2 Group	**$127.12** kit LCS.3.2	**$229.56** kit LCS.6.2	**$455.93**	**$455.93**	**$685.49**	**$939.73**
3 Group	**$153.18** kit LCS.3.3	**$255.62** kit LCS.6.3	**$479.95**	**$479.95**	**$735.57**	**$1,041.93**
4 Group	**$179.24** kit LCS.3.4	**$281.68** kit LCS.6.4	**$503.97**	**$503.97**	**$785.65**	**$1,144.13**

12-month PM

Water test, clean and backflush, group gaskets, diffuser screens, steam valve rebuild, vacuum breakers, safety valve, AV tests, and full operational checks

6-month PM

Replace group gaskets and diffuser screens, rebuild the steam valves, plus inspections: baskets and springs, buttons, brew pressure, expansion valve, flow meter resistance, boiler temperature, leaks, flow rates, auto-fill probe and drain.

3/9-month PM

Replace group gaskets and diffuser screens, plus the same inspections: baskets and springs, buttons, brew pressure, expansion valve, flow meter resistance, boiler temperature, leaks, flow rates, auto-fill probe and drain.

Each visit is PM kit + 1 hr program labor ($37.50/hr) + program trip ($37.50), with 75% off labor and trip. The 12-month price includes the full annual parts list.

SUMMARY

12-Month PM Cost by Configuration

CONFIGURATION	PARTS	LABOR	TRIP	12-MONTH PM TOTAL	6-MONTH PM TOTAL	3/9-MONTH PM TOTAL
1 Group	$319.41	$75.00	$37.50	**$431.91**	**$211.77**	**$101.06**
2 Group	$343.43	$75.00	$37.50	**$455.93**	**$229.56**	**$127.12**
3 Group	$367.45	$75.00	$37.50	**$479.95**	**$255.62**	**$153.18**
4 Group	$391.47	$75.00	$37.50	**$503.97**	**$281.68**	**$179.24**

GOOD TO KNOW

- A 12-month PM is highly recommended every year. For high-volume locations we recommend 6-month intervals.
- Labor and trip are 75% off standard rates and are included in every total.
- Parts are list price. Items that are only inspected are quoted if they need replacing.
- Installation is not included in PM pricing.